



## ***Compact Thrust Conveyor Type PHFK 20***

**The economical solution  
for conveying rates up  
to 1,5 m<sup>3</sup>/h**

- Pneumatic dense phase conveyor in compact and robust design with low height.
- Complete emptying.
- Conveying rate up to approx. 1,5 m<sup>3</sup>/h at conveying distances up to 40 m (depending on product characteristics).
- Energy saving device for optimum setting of operational data (product loading and throughput).
- Low conveying gas consumption.


# Compact Thrust Conveyor Type PHFK 20

## efficient and economical

**H**ow it works: The product is conveyed in layers using medium pressure and velocity. The controlled introduction of conveying air separately into the discharge elbow allows an optimum and every saving operation. Suitable for coarse granules as well as fine powders.




### Applications:

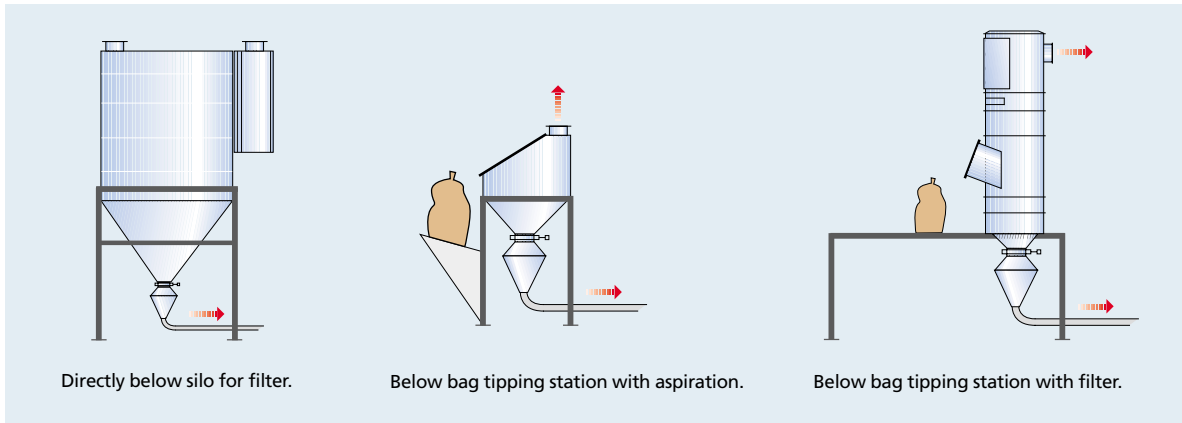

### Design:

The compact Thrust Conveyor consists of pressure vessel of 17 to 20 litres net, pneumatically operated inlet valve, air manifold, outlet with bend for connection to flexible or fixed conveying pipe. With electronic timer control. Material (product contact): stainless steel

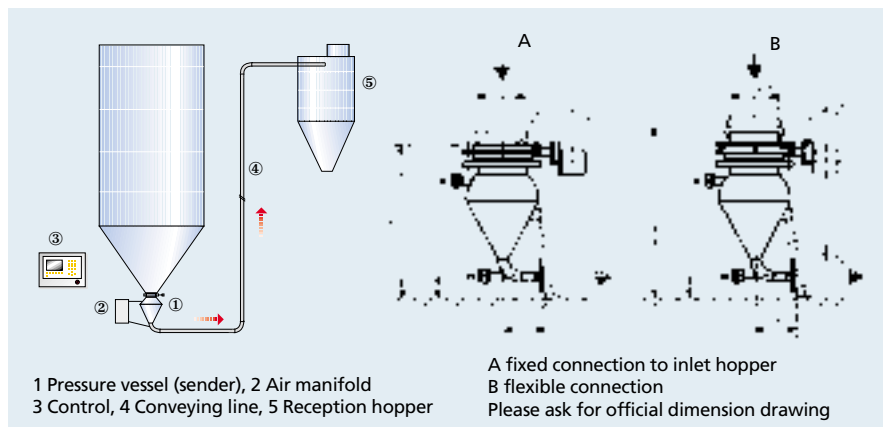

### Connections:

Supply voltage: 24 V DC  
Compressed air:  
Conveying air: 3,5 bar  
Control air: 5 bar

Are you interested to learn more about our innovative concept? Please contact us. We would be pleased to provide you with any further information!

# Gericke

### Powder Processing Equipment & Systems

CH-8105 Regensdorf    D-78239 Rielasingen    GB-Ashton-u.L. OL6 7DJ  
Tel. +41 (1) 871 36 36    Tel. +49 (7731) 929-0    Tel. 0161 344 1140  
Fax +41 (1) 871 36 00    Fax +49 (7731) 929-312    Fax 0161308 3403  
gericke.ch@gericke.net    gericke.de@gericke.net    gericke.uk@gericke.net

Singapore 787813    F-95100 Argenteuil    NL-3870 Hoevelaken  
gericke.sg@gericke.net    gericke.fr@gericke.net    gericke.nl@gericke.net

Visit our Internet site: [www.gericke.net](http://www.gericke.net), e-mail: [info@gericke.net](mailto:info@gericke.net)